




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B32B 15/08</b>	<b>A1</b>	(11) International Publication Number: <b>WO 98/53989</b> (43) International Publication Date: 3 December 1998 (03.12.98)
(21) International Application Number: PCT/EP98/03173 (22) International Filing Date: 22 May 1998 (22.05.98) (30) Priority Data: 97201565.5      28 May 1997 (28.05.97)      EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant (for all designated States except US): AKZO NOBEL N.V. [NL/NL]; Velperweg 76, NL-6824 BM Arnhem (NL). (72) Inventor; and (75) Inventor/Applicant (for US only): ROEBROEKS, Gerardus, Hubertus, Joannes, Joseph [NL/NL]; Bommelsedijk 2, NL-3528 LB Den Bommel (NL). (74) Agent: SCHALKWIJK, Pieter, Cornelis; Akzo Nobel N.V., Patent Dept. (Dept. APTA), P.O. Box 9300, NL-6800 SB Arnhem (NL).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report.	

(54) Title: METHOD FOR MAKING A LAMINATE AND LAMINATE OBTAINABLE BY SAID METHOD

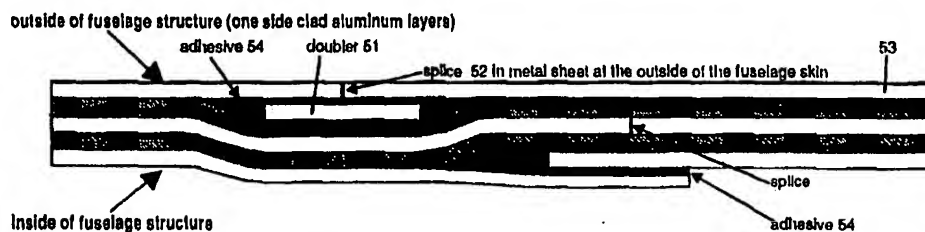

## (57) Abstract

The invention pertains to a method for making a laminate comprising at least the following steps: placing a first metal sheet on a form tool or a substrate, placing an adhesive layer on top of the first metal sheet, placing a second metal sheet on top of the adhesive layer such that at least one of the metal sheets overlaps at least one edge of the other metal sheet, applying heat and pressure to the thus obtained stack, where during the application of pressure at least one of the metal sheets is bent towards the plane of the other metal sheet. Thus, complicated structures can be optimized for a certain application and, besides, manufactured in one go using comparatively inexpensive tools.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

loads in a direction transverse to the splice lines) of the laminate at and near the splice in the metal layers.

Figure 1 shows a schematic cross-section of a spliced metal-polymer laminate (numeral 11 in Figure 1) consisting of three aluminium layers (12) and two fibre reinforced adhesive layers (13; each of these layers consists of two unidirectional prepregs, i.e. prepregs containing straight and parallel filaments, rotated 90° with respect to one another) in between the aluminium layers (12). The aluminium layers (12) each consist of two or more aluminium sheets (14) separated by a splice (15). A doubler (16), which is also a metal-polymer laminate, bridges the splice (15) in the top aluminium layer (12) of the spliced laminate (11) and is attached thereto by means of a curable adhesive (17).

The manufacture of the structure according to Figure 1 involves several process steps (production of the spliced laminate (11) and the doubler (16) and subsequent bonding of the two) and requires, for instance if a doubler (16) has to be bonded to both sides of the spliced laminate (11), very expensive form or bonding tools machined to accommodate the doubler that is in contact with the tool. Further, the doubler (16) forms a protrusion which will impair the appearance as well as the aerodynamic properties when the laminate is used in the skin of an aircraft.

It is an object of the present invention to further expand and improve the splicing concept disclosed in US 5,429,326, in particular by solving the problems encountered in the use of doublers and other irregularities in the laminate. This and other objects, which will be discussed below, are achieved using a method as described in the opening paragraph of this description where during the application of pressure at least one of the metal sheets is bent towards the plane of the other metal sheet (i.e., out of its own plane) and the form of the metal sheets is fixed.

This method advantageously exploits the low bending stiffness of the uncured laminate, i.e., the stack of metal and adhesive layers prior to the application of heat and pressure, and the fixation or freezing of the deformations in laminate by, e.g., curing, evaporation of a solvent contained in the adhesive, or cooling  
5 below the T<sub>g</sub> of the adhesive. With the invention, each metal layer is forced to take on the form of the stack directly beneath it.

Preferably, the metal sheet is displaced over a distance which is of at least about the same order of magnitude as the thickness of the adhesive layer or  
10 the thickness of the adhesive layer and a metal sheet.

Figure 2 shows a structure obtained via the method of the present invention with only one autoclave cycle (duration: approximately 1 hour) at conventional pressure and heat levels, viz. 5 bar and 120 °C. A first aluminium doubler (21; 2024-T3 having a thickness of 0.3 mm and having been subjected to an  
15 alkaline degreasing treatment followed by etching or anodising and application of a primer) is placed on a form tool (not shown) having a flat and smooth surface. Three aluminium layers (22; again, 2024-T3 having a thickness of 0,3 mm and having been subjected to the same treatment as the doubler (21)) and  
20 two adhesive layers (23; each consisting of three layers (0°-90°-0°) of unidirectional S2-glass fibres in F185 ex Hexcel) in between the aluminium layers (22) are stacked on top of the doubler (21), with the splice (24) in the aluminium layer (22) nearest the doubler (21) positioned halfway along the width of the doubler (21). A second doubler (25) is placed over the splice in the  
25 aluminium layer farthest from the first doubler (21). An adhesive (26; AF 163-2K ex 3M) is present between the doublers (21, 25) and the aluminium layers (22). Subsequently, heat and pressure are applied (on the side marked "inside of fuselage structure"). During this the spliced laminate is bent around the doubler (21), and the adhesive layers (23) and the adhesive (26) are cured. At  
30 the locations of the doubler (21) the layers of the spliced laminate are curved to form a fully (aerodynamic) flat surface with the doubler (21).

Of course, the invention is in no way restricted to doublers and the like. Figure 3 shows a so-called ply-drop-off obtained with the present method. The lower metal layers (31) and adhesive layers (32) serve as a substrate, which will become an integral part of the laminate, upon which substrate a first metal layer (33), an adhesive layer (34), and a second metal layer (35), which is in this case the top layer, are subsequently stacked. Upon application of pressure the second metal layer (35) gently takes on the form of the end of the prepreg. It is preferred to use an additional adhesive (36) near the end of the adhesive layer (34). If the adhesive layer (34) comprises two or more prepregs, it is preferred to have the number of prepregs increase step-by-step away from the end of the second metal sheet (35). Thus, the changes in thickness become all the more gradual.

The ply-drop-off obtained with the method at hand is stronger, less sensitive to delamination, and changes in thickness are much more gradual than in the conventional ones.

As will be apparent from the above explanations, the present invention offers the designer of the laminates great freedom. Figures 4 and 5 show further examples of advantageous embodiments of the present invention.

Figure 4 provides an alternative to the use of a separate doubler as described above. By using a splice (41) shaped as an overlap, part of the metal layer (42) effectively serves as a doubler.

Some airlines or other airplane owners desire to have what is called a "bright-skin aircraft." To this end a clad (a thin metal layer, usually of aluminium) is provided over the outside of the aluminium sheets used in the skin. For a polymer-metal laminate this means that the outer aluminium sheets (42, 44) will have a clad layer at one side (marked "outside of the fuselage structure") and

that the clad layer is also present in splice shaped as overlap (41). In the aircraft industry it is preferred not to bond metal together in clad zone, since these bonds are of importance to the integrity of the primary structure of the airplane and the interaction between the clad and the adhesive in an corrosive environment may result in unfavourable behaviour. Further, the adhesive fillets (26 and 43 in Figures 2 and 4, respectively) which normally have a width of 6 - 10 mm will remain visible on the outside of the unpainted fuselage skin.

In view of the above reasons, the configurations shown in Figs. 2 and 4 are less desirable in the mentioned "bright-skin aircraft." However, both problems (clad in the bonding zone and broad, visible fillets) are solved by a further and preferred embodiment of the present invention shown in Figure 5. Instead of placing the doubler (51) directly on a form tool, it is stacked on a substrate (mounted on a form tool), in this case a metal layer (53) consisting of at least two metal sheets or sections separated by a splice (52). The metal sheets constituting the metal layer (53) are clad only on the side contacting the form tool and will become an integral part of the laminate. During the application of pressure and heat the doubler (51) and the metal layer (53) will not deform, whereas the rest of the spliced laminate (metal layers and prepregs) are bent around the doubler (51). -

The actual bonding zones are embedded in the laminate and do not contain any clad. Also, only a very thin (0.1 - 0.6 mm) splice (52) is visible on the outside of the skin of the fuselage structure.

Additional advantages of this configuration are obviating the need for anodizing and priming only a small edge (i.e., the overlap in Fig. 4) of the outside of the aluminium metal sheets when a polished fuselage skin is desired (those parts of the metal sheets that are in contact with an adhesive have to be anodised and primed) and, in painted aircraft, the avoidance of damage to the bonding zones during (periodic) paint removal and.

The form tool or substrate on which the metal layers and adhesive layers are stacked need not be flat. It can, for instance, be shaped as the negative of a single- or double-curved body panel for an aircraft or indeed any other desired form. That way, the panel or other desired form is manufactured in one go  
5 instead first making a flat laminate by stacking and curing and subsequently shaping the laminate into such a form. The radius of single-curved body panels for use in the fuselage preferably lies within a range from 1 to 7 m. Incidentally, this insight of using a form tool shaped to meet (at least some of) the requirements of an end-product so as to reduce the number of process steps  
10 yet again, is also very useful on its own, i.e., without the presence of the more local deformations which are the subject of the present invention.

The laminates according to the present invention preferably contain 2 to about 20 metal layers and about 1 to about 19 adhesive layers. The metal layers are  
15 preferably less than about 1.5 mm thick, more preferably about 0.1-0.9 mm, and most preferably about 0.2-0.5 mm. In a preferred embodiment, the metal layers have a thickness of about 0.3 mm (0.012 inch).

The metal sheets are preferably made from a metal having a tensile strength of  
20 more than 0.20 GPa. Examples of suitable metals are aluminium alloys, steel alloys, titanium alloys, copper alloys, magnesium alloys, and aluminium matrix composites. Aluminium-copper alloys of the AA2000 series, aluminium - manganese alloys of the AA3000 series, aluminium-magnesium alloys of the AA5000 series, aluminium-zinc alloys of the AA7000 series, and aluminium-  
25 magnesium-silicon alloys of the AA6000 series are preferred. Some particularly preferred alloys are AA2024 aluminium-copper, AA7075 aluminium-zinc, and AA6013 aluminium-magnesium-silicon. Two preferred alloys are AA2X24-T3 and AA7X75-T6. When superior corrosion resistance is desired, a sheet of AA5052 alloy may be included in the laminate. Further, the laminates disclosed  
30 in US 5,547,735, which comprise at least two metal sheets each of a different alloy, are also very suitable for use in the present invention.

It should be noted that the bends in the metal sheet may include both an elastic and a plastic deformation component. Which of the components prevails will depend largely on the material types, the dimensions, and the manufacturing conditions.

The adhesive layers are, preferably, reinforced with (glass) fibres. If splices are present in the laminate, part of the (glass) fibres should preferably bridge the splices and they should generally be uninterrupted adjacent to the splice lines.

10 The fibres may be oriented individually or in groups, in one direction or in several different directions, depending on the loading conditions of the structure. Preferably, at least about half of the fibres extend perpendicular to the splice lines in adjacent metal layers. In a particularly preferred embodiment, about half of the fibres are oriented in 0° (longitudinal) direction, while roughly

15 the other half are oriented in a 90° (transverse) direction. Alternatively, about one third of the fibres may be oriented at 0° and about two thirds at 90°, or about two thirds may be oriented at 0° and about one third at 90°.

The adhesive layers preferably comprises synthetic polymers. Examples of

20 suitable non-thermoplastic polymers are epoxy resins, unsaturated polyesters, vinyl esters, phenolic resins, and thermoplastic resins. Suitable thermoplastic polymers are, e.g., polyarylates (PAR), polysulphones (PSO), polyether sulphones (PES), polyether imides (PEI), or polyphenylene ethers (PEE), polyphenylene sulphide (PPS), polyamide-4,6, polyketone sulphide (PKS),

25 polyether ketones (PEK), polyether ether ketone (PEEK), and polyether ketone-ketone (PEKK). As mentioned above, in addition to the adhesive that is part of the adhesive layers, adhesives (see, e.g., the adhesives denoted by numerals 17, 26, 36, 43, 54) are used locally in other parts of the laminates. In principle, all adhesives suitable for use in the adhesive layers are also suitable for use as

30 'local' adhesive.



The adhesive layers have a thickness similar to that of the metal layers. The adhesive layers are preferably less than about 1.5 mm thick, more preferably about 0.1-0.9 mm, and most preferably about 0.2-0.5 mm. Adhesive layers of about 0.3 mm (0.012 inch) thickness are utilized in a preferred embodiment.

5

Preferred fibres for reinforcing the adhesive layers are continuous fibres or filaments of a material such as glass, aromatic polyamides ("aramids"), and carbon. The preferred glass fibres are S-2 glass or R-glass fibres, each containing about 58-69 wt.%  $\text{SiO}_2$ , 18-29 wt.%  $\text{Al}_2\text{O}_3$ , and 7-19 wt.% mGo. Also  
10 suitable are less expensive E-glass fibres, which contain about 55 wt.%  $\text{SiO}_2$ , 15 wt.%  $\text{Al}_2\text{O}_3$ , 19 wt.%  $\text{CaO}$ , 7wt.%  $\text{B}_2\text{O}_3$ , and 3 wt.%  $\text{MgO}$ . One suitable aramid fibre is made from poly-para-phenylene terephthalamide. The fibres may have a modulus of elasticity of about 60-650 GPa and an elongation at break of about 0.2-8%. The fibres preferably are continuous filaments each  
15 having a diameter of about 3-30 microns.

A preferred laminate is reinforced with S-2 glass fibres in the adhesive layers. The S-2 glass fibres preferably have a diameter of about 8-12 microns, and they make up about 35-75%, preferably about 57-63%, of the total volume of  
20 adhesive and fibre in the reinforced adhesive layers.

In addition to the materials and configurations described above reference may be had to, int. al., EP 056288, EP 056289, EP 312150, and EP 312151, which all concern unspliced metal-polymer laminates containing materials suitable for  
25 use in the present invention.

The invention further pertains to a laminate (obtainable by the method described hereinbefore) which comprises at least a first and a second metal sheet and at least one adhesive layer provided between and bonded to the  
30 metal sheets, with (in top view) at least one of the metal sheets overlapping at least one edge of the other metal sheet, and wherein at least one of the metal

sheets is bent towards and preferably also substantially extends in the plane of the other metal sheet. It is preferred that an additional adhesive is applied in the area where the metal sheets overlap.

- 5 These laminates can exhibit a flat surface in spite of the presence of "irregularities" such as doublers, are relatively inexpensive, for they can be manufactured in one production cycle using comparatively inexpensive tools, allow the production of spliced panels with a reduced weight, and exhibit ply-drop-off configurations with high strength. Also, testing of these laminates  
10 revealed that they have substantially the same mechanical properties as conventional metal-polymer laminates (viz., excellent fatigue resistance, high residual strength, fire resistance, corrosion resistance, etc.).

- A further advantage resides in that the interference of the splice details (e.g.,  
15 splice lines, doublers) with the structural details of the aircraft design (e.g., location of stringers, shear cleads, frames windows, doors) can be kept to a minimum, because the minimum thickness step in the new concept is smaller than that for conventional production methods (compare Fig. 1 with Fig. 3) and also smaller than 0.5.- 0.6 mm, which is the maximum thickness step that may,  
20 in practice, still be bridged by stringers.

- The invention also pertains to a constructional component for a vehicle, spacecraft, or aircraft comprising a laminate according to the invention and to  
25 an aircraft comprising the said laminate.

- It should be noted that EP 502 620 discloses the overlaying of additional sheets or doublers of a superplastically formable material on a main sheet of material (prior to superplastic forming) in regions where additional strength is required or where excessive elongation is to occur during forming which,  
30 otherwise, would result in the region being locally thinned or weakened (see, e.g., the abstract and Fig. 7 of the said patent application). Metal-polymer

laminates are not mentioned and, in fact, the described superplastic forming technique is not at all suitable for the manufacture of such laminates.

Within the framework of the present invention the words "top view" should be  
5 construed as parallel to the normal of the surface of the metal sheets. The  
"plane of the metal sheet" is the plane through the part of the metal sheet that  
is not displaced or deformed. This plane may, of course, be curved.

## Claims:

1. Method for making a laminate comprising at least the following steps:  
placing a first metal sheet on a form tool or a substrate,  
5 placing an adhesive layer over of the first metal sheet,  
placing a second metal sheet over of the adhesive layer such that at  
least one of the metal sheets overlaps at least one edge of the other  
metal sheet  
applying heat and pressure to the thus obtained stack,  
10 characterized in that  
during the application of pressure at least one of the metal sheets is  
bent towards the plane of the other metal sheet after which the form of  
the metal sheets is fixed.
- 15 2. Method according to claim 1, characterized in that the second metal  
sheet is bent towards the plane of the first metal sheet.
3. Method according to claim 1 or 2, characterized in that the surface of the  
form tool or substrate facing the stack is substantially smooth and/or  
20 curved.
4. Method according to any one of claims 1-3, characterized in that the  
adhesive layer comprises at least one prepreg.
- 25 5. Method according to any one of claims 1-4, characterized in that the the  
first metal layer is a doubler and the second metal layer comprises a  
splice which is positioned at or near the middle of the first metal layer.
- 30 6. Method according to any one of claims 1-4, characterized in that the  
substrate comprises at least one metal layer and at least one adhesive  
layer.

7. Method according to any one of claims 1-4, characterized in that the adhesive layer in between the first and the second metal sheet comprises at least two preregs and the number of preregs increases step-by-step away from the end of the overlapped edge.
8. Method according to any one of claims 1-4, characterized in that the substrate is a metal layer.
9. Laminate comprising at least a first and a second metal sheet and at least one adhesive layer provided between and bonded to the metal sheets, with at least one of the metal sheets overlapping at least one edge of the other metal sheet, characterized in that at least one of the metal sheets is bent towards and/or substantially extends in the plane of the other metal sheet.
10. Laminate according to claim 9, characterized in that it contains a doubler.
11. Laminate according to claim 9 or 10, characterized in that the adhesive layer contains reinforcing fibres.
12. Laminate according to any one of claims 9 to 11, characterized in that the adhesive layer in between the first and the second metal sheet comprises at least two preregs and the number of preregs increases step-by-step away from the end of the overlapped edge.
13. Constructional component for a vehicle, spacecraft, or aircraft, comprising a laminate according to any one of claims 9-12.
14. Aircraft comprising a laminate according to any one of claims 9-12.

Figure 1

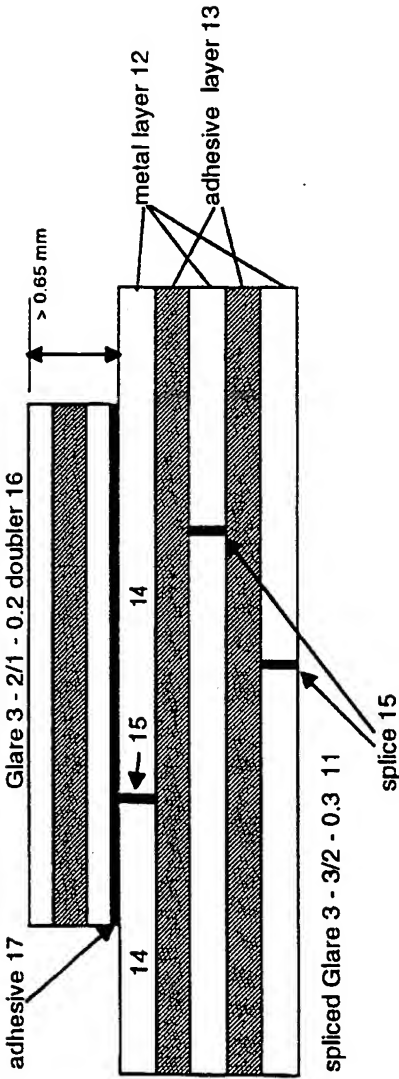


Figure 2

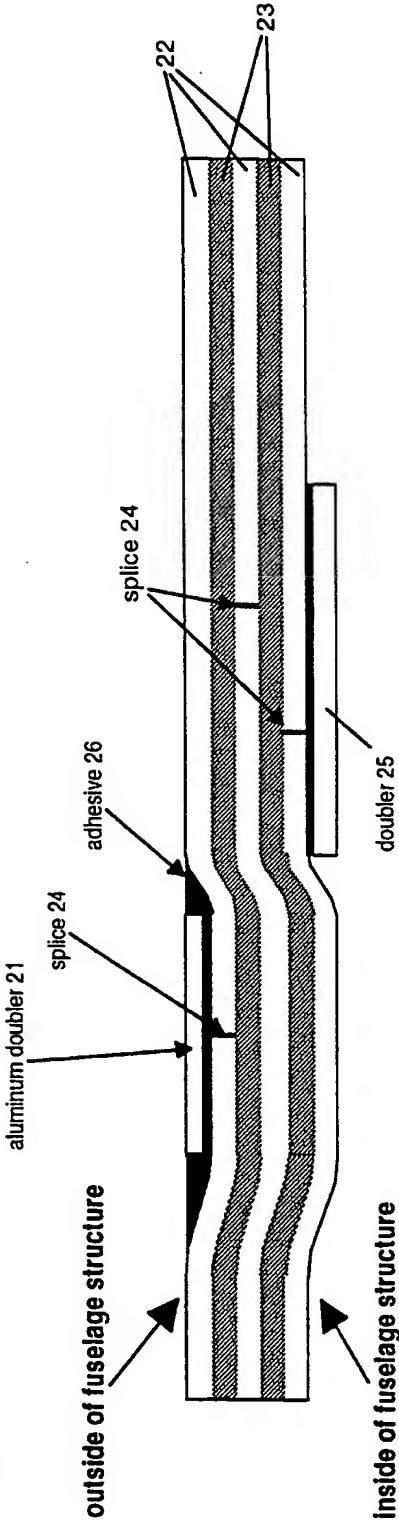


Figure 3

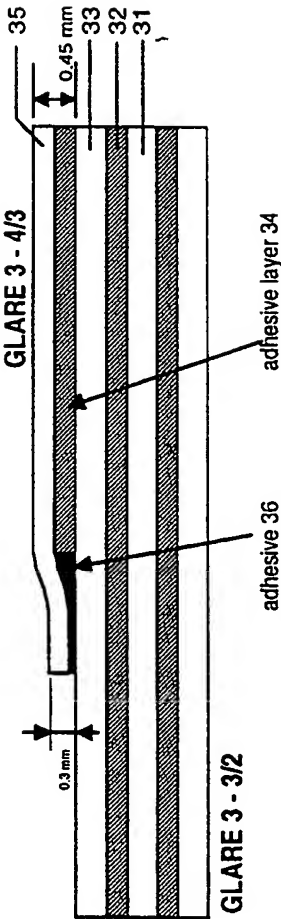


Figure 4


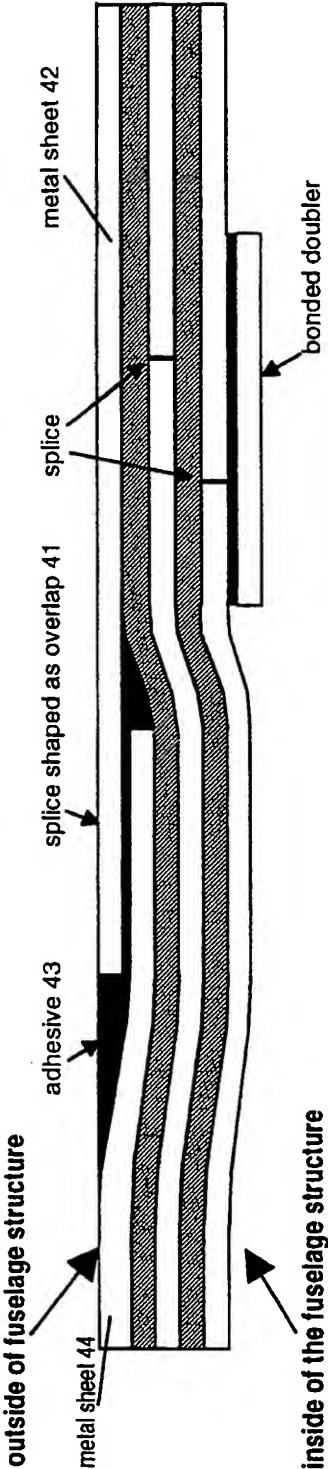


Figure 5



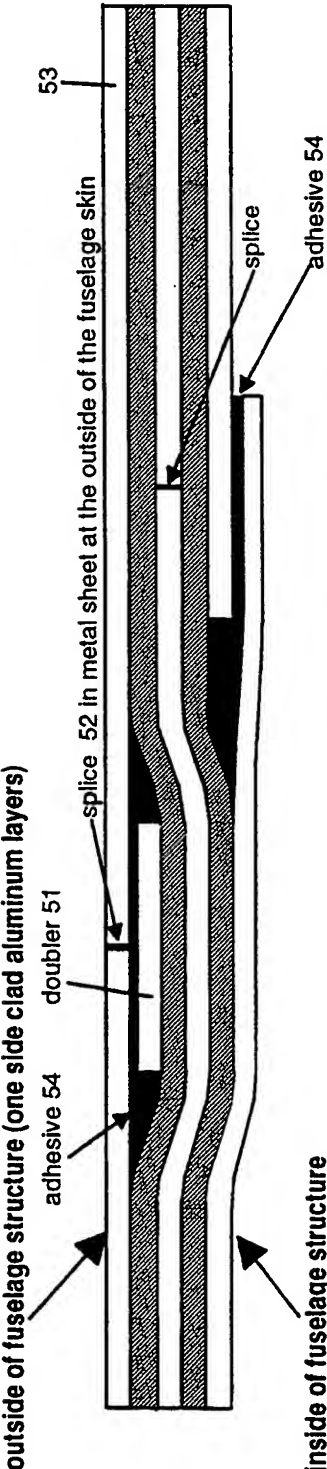

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/03173

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 B32B15/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B32B B64C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 429 326 A (GARESCHE CARL E ET AL) 4 July 1995 cited in the application see the whole document -----	1,9

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

7 September 1998

Date of mailing of the international search report

15/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

De Jonge, S

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/03173

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5429326 A	04-07-1995	DE 69314175 D	30-10-1997
		DE 69314175 T	12-03-1998
		EP 0649373 A	26-04-1995
		ES 2108275 T	16-12-1997
		JP 8502217 T	12-03-1996
		WO 9401277 A	20-01-1994
-----			

# RAPPORT DE RECHERCHE INTERNATIONALE

Demande internationale No

PCT/FR 03/02764

**A. CLASSEMENT DE L'OBJET DE LA DEMANDE**  
CIB 7 B32B15/08 B64C1/00

Selon la classification internationale des brevets (CIB) ou à la fois selon la classification nationale et la CIB

**RECU Le :**

**B. DOMAINES SUR LESQUELS LA RECHERCHE A PORTE**

Documentation minimale consultée (système de classification suivi des symboles de classement)

CIB 7 B32B B64C

12 MARS 2004

Documentation consultée autre que la documentation minimale dans la mesure où ces documents relèvent des domaines sur lesquels a porté la recherche

Base de données électronique consultée au cours de la recherche internationale (nom de la base de données, et si réalisable, termes de recherche utilisés)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERES COMME PERTINENTS**

Catégorie *	Identification des documents cités, avec, le cas échéant, l'indication des passages pertinents	no. des revendications visées
X	US 5 547 735 A (MATTOUSCH ARTHUR C ET AL) 20 août 1996 (1996-08-20) colonne 1, ligne 29 - colonne 2, ligne 15; revendications 1,8,14,15,17 colonne 4, ligne 66 - colonne 5, ligne 3 ---	1-13,16
X	WO 98 53989 A (AKZO NOBEL NV ;ROEBROEKS GERARDUS HUBERTUS JO (NL)) 3 décembre 1998 (1998-12-03) cité dans la demande page 6, alinéa 2 - dernière ligne; revendications 9,11,13,14; figures ---	1-17
A	US 4 657 717 A (CATTANACH JAMES B ET AL) 14 avril 1987 (1987-04-14) colonne 2, ligne 19 - ligne 22; figure 1 colonne 7, ligne 16 - ligne 30 ---	1-17
	-/--	

☒ Voir la suite du cadre C pour la fin de la liste des documents

☒ Les documents de familles de brevets sont indiqués en annexe

\* Catégories spéciales de documents cités:

- \*A\* document définissant l'état général de la technique, non considéré comme particulièrement pertinent
- \*E\* document antérieur, mais publié à la date de dépôt international ou après cette date
- \*L\* document pouvant jeter un doute sur une revendication de priorité ou cité pour déterminer la date de publication d'une autre citation ou pour une raison spéciale (telle qu'indiquée)
- \*O\* document se référant à une divulgation orale, à un usage, à une exposition ou tous autres moyens
- \*P\* document publié avant la date de dépôt international, mais postérieurement à la date de priorité revendiquée

- \*T\* document ultérieur publié après la date de dépôt international ou la date de priorité et n'appartenant pas à l'état de la technique pertinent, mais cité pour comprendre le principe ou la théorie constituant la base de l'invention
- \*X\* document particulièrement pertinent; l'invention revendiquée ne peut être considérée comme nouvelle ou comme impliquant une activité inventive par rapport au document considéré isolément
- \*Y\* document particulièrement pertinent; l'invention revendiquée ne peut être considérée comme impliquant une activité inventive lorsque le document est associé à un ou plusieurs autres documents de même nature, cette combinaison étant évidente pour une personne du métier
- \*&\* document qui fait partie de la même famille de brevets

Date à laquelle la recherche internationale a été effectivement achevée

1 mars 2004

Date d'expédition du présent rapport de recherche internationale

12/03/2004


Nom et adresse postale de l'administration chargée de la recherche internationale  
Office Européen des Brevets, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Fonctionnaire autorisé

Pamies Oille, S

## C.(suite) DOCUMENTS CONSIDERES COMME PERTINENTS

Catégorie	Identification des documents cités, avec, le cas échéant, l'indication des passages pertinents	no. des revendications visées
A	EP 0 312 151 A (AKZO NV) 19 avril 1989 (1989-04-19) page 2, ligne 43 - ligne 46; revendications 1,7-10,21,22; figures 5,6 ---	1-17
A	EP 0 056 288 A (DELFT TECH HOGESCHOOL) 21 juillet 1982 (1982-07-21) cité dans la demande page 2, alinéa 2; revendications 1,6-10,23,28 -----	1-17

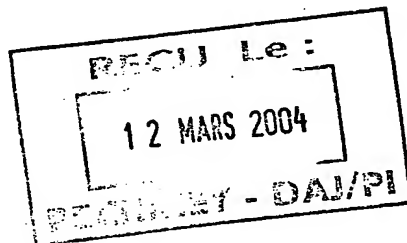

# RAPPORT DE RECHERCHE INTERNATIONALE

Renseignements relatifs aux membres de familles de brevets

Demande Internationale No

PCT/FR 03/02764

Document brevet cité au rapport de recherche		Date de publication	Membre(s) de la famille de brevet(s)	Date de publication
US 5547735	A	20-08-1996	AUCUN	
WO 9853989	A	03-12-1998	AT 226512 T AU 8435298 A DE 69808903 D1 DE 69808903 T2 WO 9853989 A1 EP 0983141 A1 ES 2186184 T3 JP 2001526601 T	15-11-2002 30-12-1998 28-11-2002 07-08-2003 03-12-1998 08-03-2000 01-05-2003 18-12-2001
US 4657717	A	14-04-1987	AT 31158 T AU 564281 B2 AU 4001885 A BR 8501172 A CA 1243177 A1 DE 3561094 D1 EP 0155820 A2 ES 8606088 A1 GB 2155845 A ,B IL 74608 A JP 1759943 C JP 4037764 B JP 61002518 A NO 851017 A ,B, NZ 211458 A ZA 8501944 A	15-12-1987 06-08-1987 19-09-1985 12-11-1985 18-10-1988 14-01-1988 25-09-1985 01-10-1986 02-10-1985 31-10-1989 20-05-1993 22-06-1992 08-01-1986 17-09-1985 31-03-1987 27-11-1985
EP 0312151	A	19-04-1989	AT 61970 T CA 1306936 C DE 3862185 D1 EP 0312151 A1 GR 3002178 T3 JP 1136736 A JP 2660563 B2 US 5039571 A	15-04-1991 01-09-1992 02-05-1991 19-04-1989 30-12-1992 30-05-1989 08-10-1997 13-08-1991
EP 0056288	A	21-07-1982	NL 8100088 A AT 18371 T DE 3269541 D1 EP 0056288 A1 IE 53137 B1 JP 1599894 C JP 2026582 B JP 57137149 A US 4489123 A	02-08-1982 15-03-1986 10-04-1986 21-07-1982 20-07-1988 31-01-1991 11-06-1990 24-08-1982 18-12-1984

